

# Leica DISTO™ E7500i

The original laser distance meter





- when it has to be **right**

*Leica*  
Geosystems

<b>Instrument Set-up</b> .....	<b>2</b>	Memory .....	15
Introduction .....	2	Measuring single distance .....	15
Overview .....	2	Smart Horizontal Mode .....	15
Basic measuring screen .....	3	Inclination tracking .....	16
Selection screen .....	3	Area .....	16
Pointfinder (Viewscreen) .....	4	Volume .....	17
Insert batteries .....	4	Triangular area .....	18
<b>Operations</b> .....	<b>5</b>	Long range mode .....	18
Switching ON/OFF .....	5	Height-profile measurement .....	19
Clear .....	5	Sloped objects .....	20
Message Codes .....	5	Height tracking .....	21
Multifunctional endpiece .....	5	Trapezium .....	22
Permanent / Minimum-Maximum measuring .....	5	Stake out .....	23
Add / Subtract .....	6	Pythagoras (2-point) .....	24
Pointfinder (Viewscreen) .....	6	Pythagoras (3-point) .....	25
<b>Settings</b> .....	<b>7</b>	<b>Technical Data</b> .....	<b>26</b>
Overview .....	7	<b>Message Codes</b> .....	<b>27</b>
Tilt units .....	7	<b>Care</b> .....	<b>27</b>
Distance units .....	8	<b>Warranty</b> .....	<b>27</b>
Beep ON/OFF .....	8	<b>Safety Instructions</b> .....	<b>27</b>
Digital level ON/OFF .....	8	Areas of responsibility .....	27
De-/Activate keylock .....	9	Permitted use .....	28
Switch on with keylock .....	9	Prohibited use .....	28
De-/Activate Bluetooth® Smart .....	9	Hazards in use .....	28
Calibration of tilt sensor (Tilt Calibration) .....	10	Limits of use .....	28
Personalized favorites .....	11	Disposal .....	28
Illumination .....	11	Electromagnetic Compatibility (EMC) .....	28
Offset .....	12	FCC statement (applicable in U.S.) .....	29
Reset .....	12	Use of the product with Bluetooth® .....	29
<b>Functions</b> .....	<b>13</b>	Laser classification .....	30
Overview .....	13	Labelling .....	30
Timer .....	13		
Calculator .....	13		
Adjusting measuring reference/tripod .....	14		

## Introduction

 The safety instructions and the user manual should be read through carefully before the product is used for the first time.

 The person responsible for the product must ensure that all users understand these directions and adhere to them.


The symbols used have the following meanings:

### **WARNING**


Indicates a potentially hazardous situation or an unintended use which, if not avoided, will result in death or serious injury.

### **CAUTION**


Indicates a potentially hazardous situation or an unintended use which, if not avoided, may result in minor injury and/or appreciable material, financial and environmental damage.

 Important paragraphs which must be adhered to in practice as they enable the product to be used in a technically correct and efficient manner.


## Overview

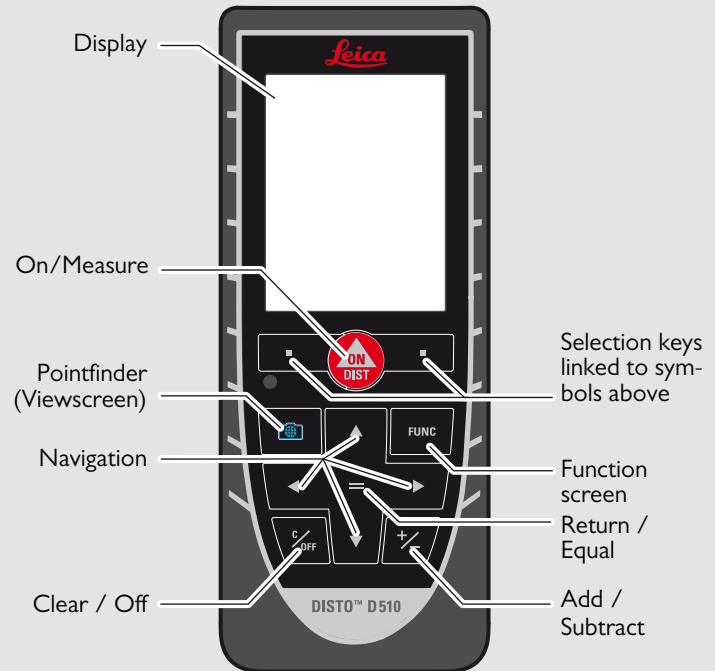


## Basic measuring screen

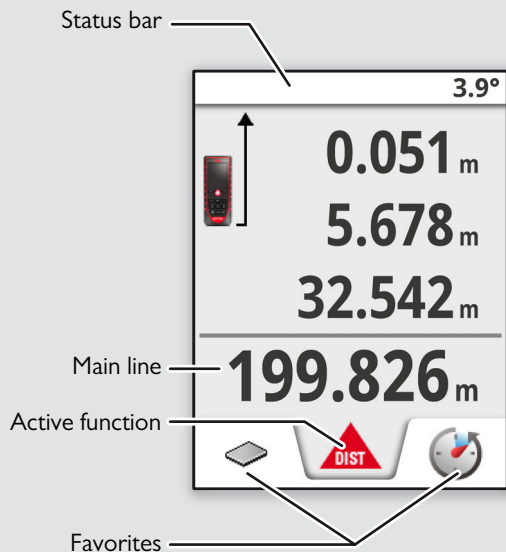


## Selection screen

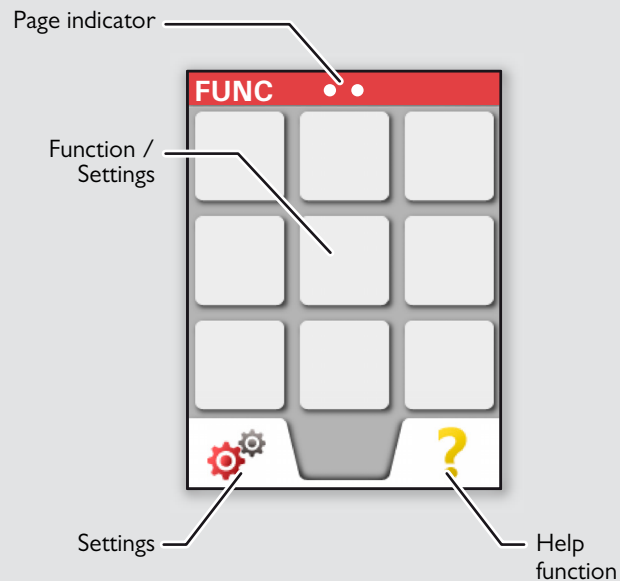


## Pointfinder (Viewscreen)

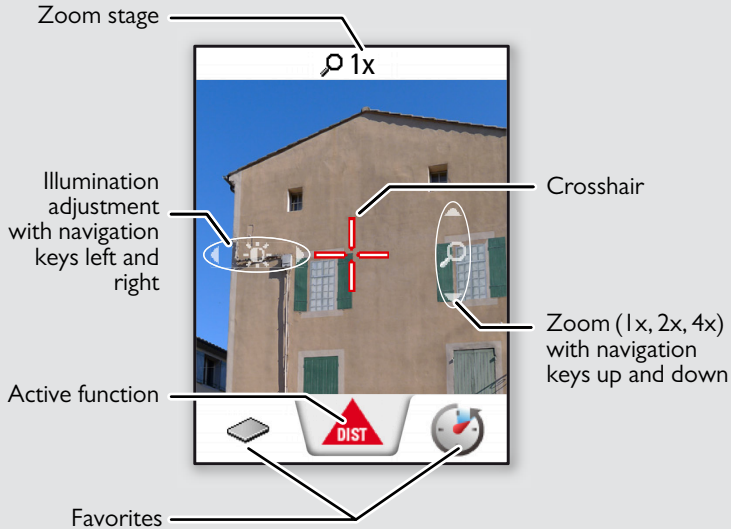

## Insert batteries

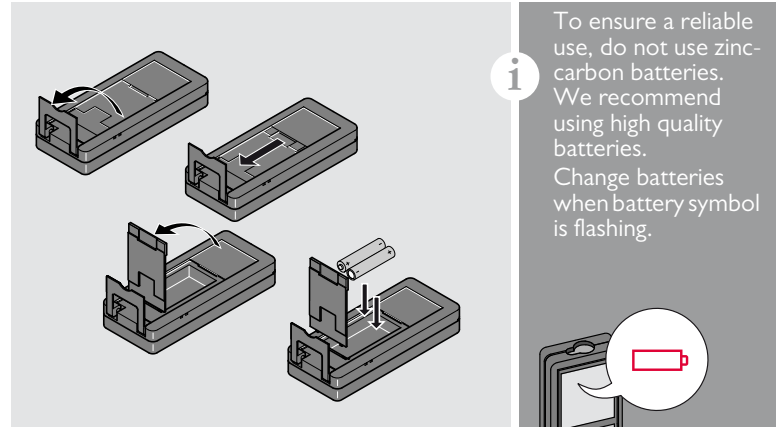

Switching ON/OFF




**ON**  
ON DIST

**OFF**  
C / OFF  
2 sec


**i** If no key is pressed for 180 sec, the device switches off automatically.

Device is turned OFF.

Clear




Undo last action.





Leave actual function, go to default operation mode.

Message Codes

If the info icon appears with a number, observe the instructions in section "Message Codes". Example:




Multifunctional endpiece

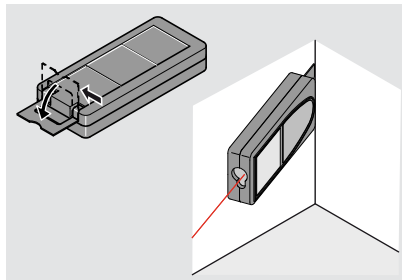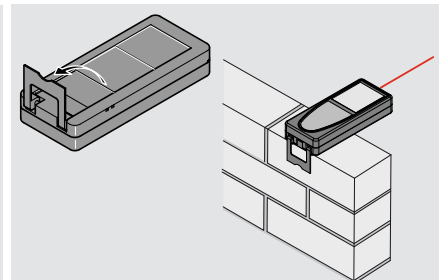


**i** The orientation of the endpiece is automatically detected and the zero point is accordingly adjusted.

Permanent / Minimum-Maximum measuring

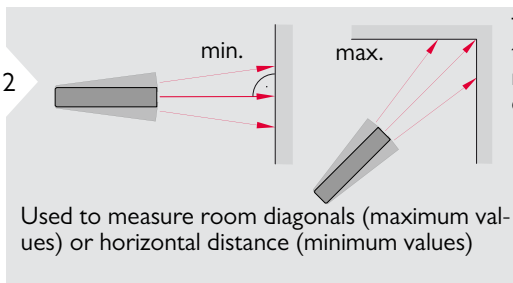

Used to measure room diagonals (maximum values) or horizontal distance (minimum values)

The minimum and maximum distance measured is displayed (min, max.). The last value measured is displayed in the main line.



Stops permanent / minimum-maximum measuring.

## Add / Subtract

1 **ON DIST**  
7.332 m

2 **+ / -**  
The next measurement is **added** to the previous one.

3 **2x**  
**+ / -**  
The next measurement is **subtracted** from the previous one.  
7.332 m  
12.847 m

4 **+ =**  
20.179 m

**i**

This process can be repeated as required. The same process can be used for adding or subtracting areas or volumes.

## Pointfinder (Viewscreen)

1 **Pointfinder**  
View of building with red crosshair.

2 **+ / -**  
4x  
2x  
1x  
Magnifying glass icons.


3 **+ / -**  
View of building with red crosshair.

4 **Pointfinder**  
Exit pointfinder (viewscreen).

**i**


This is a great help for outdoor measuring. The integrated pointfinder (viewscreen) shows the target on the display. The device measures in the middle of the cross hair, even if the laser dot is not visible. Parallax errors occur when the pointfinder camera is used on close targets, with the effect that the laser appears displaced in the crosshair. In this case rely on the real laser dot.

Overview

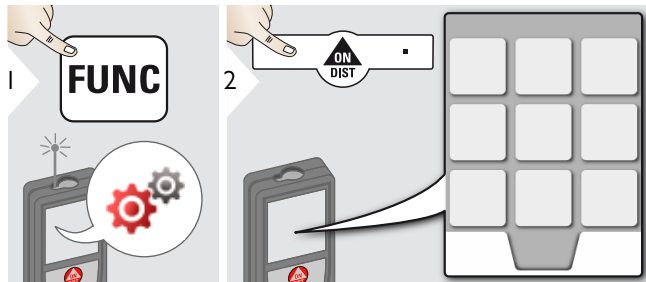




	Tilt units
	Distance units
	Beep
	Digital level
	Keypad lock
	Bluetooth®
	Tilt calibration
	Favorites
	Illumination
	Offset
	Reset
	Information

Tilt units

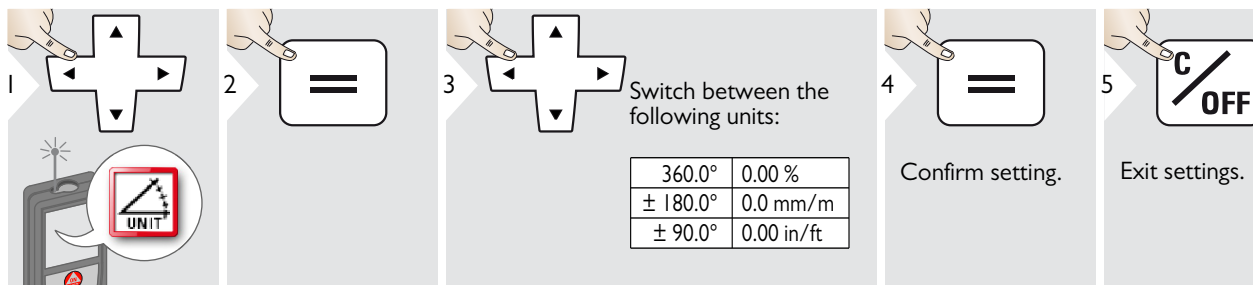




**Distance units**



Switch between the following units:

0.0000 m	0'00" 1/4
0.000 m	0.0 in
0.00 m	0 in 1/32
0.0 mm	0 in 1/16
0.00 ft	0 in 1/8
0'00" 1/32	0 in 1/4
0'00" 1/16	0.000 yd
0'00" 1/8	





Confirm setting.




Exit settings.

**Beep ON/OFF**





To switch ON, repeat procedure.




Exit settings.

**Digital level ON/OFF**




To switch ON, repeat procedure.




Exit settings.

**i** The digital level is displayed in the status bar.


## De-/Activate keylock

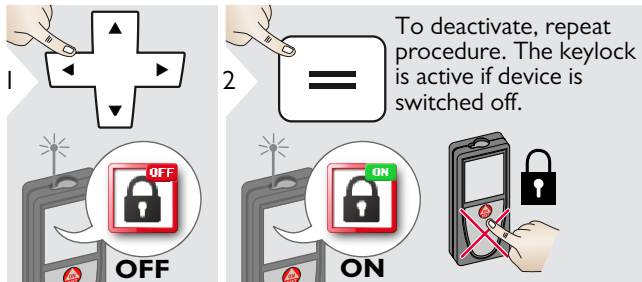

## Switch on with keylock

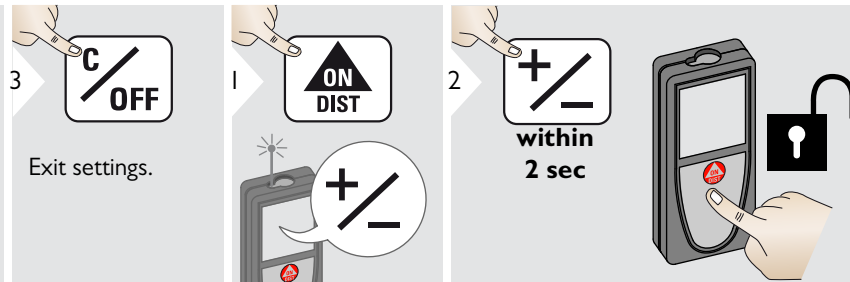

## De-/Activate Bluetooth® Smart

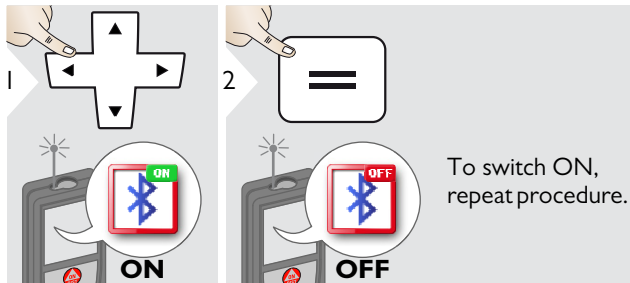

**i** Default mode: Bluetooth® is switched on. Bluetooth® icon in status line is displayed if device is connected with Bluetooth®.

**i**

Switch on Bluetooth® Smart in Settings.

Connect the device with your smart phone, pad, laptop,...

The actual measurement is transferred automatically if Bluetooth® connection is established. To transfer a result from the main line, press =. Bluetooth® switches off as soon as the laser distance meter is switched off.

The efficient and innovative Bluetooth® Smart module (with the new Bluetooth® standard V4.0) works together with all Bluetooth® Smart Ready devices. All other Bluetooth® devices do not support the energy saving Bluetooth® Smart Module, which is integrated in the device.

We provide no warranty for free DISTO™ software and offer no support for it. We accept no liability whatsoever arising from the use of the free software and we are not obliged to provide corrections nor to develop upgrades. A wide range of commercial software can be found on our homepage. Apps for Android® or Mac iOS can be found in special internet shops.

For more details, see our homepage.

Calibration of tilt sensor (Tilt Calibration)

1

2

3

Place device on absolutely flat surface.

4

ON DIST

5

180°

Turn the device horizontally by 180° and place it again on absolutely flat surface.

6

ON DIST

7

Place device on absolutely flat surface.

8

ON DIST

9

180°

Turn the device horizontally by 180° and place it again on absolutely flat surface.


10


ON DIST


✓

i After 2 sec the device goes back to the basic mode.


Personalized favorites

1 

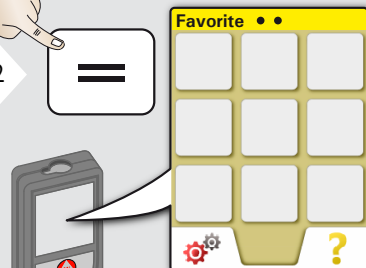
2 

3 

Select favorite function.

4 

Press selection key left or right. Function is set as favorite above the corresponding selection key.


5 


Exit settings.


**i** Select your favorite functions for quick access.

Short cut: Press 2 sec on a selection-key in the measuring mode.


Illumination

1 


2 

3 

Select brightness.

4 


Confirm setting.

5 

Exit settings.


**i** To save power reduce brightness if not necessary.

**Offset**

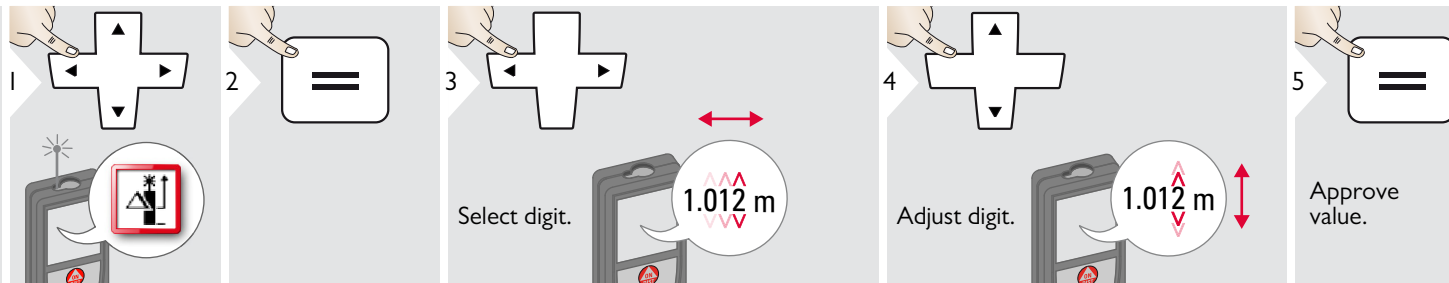


**i** An offset adds or subtracts a specified value automatically to or from all measurements. This function allows tolerances to be taken into account. The offset icon is displayed.

**Reset**

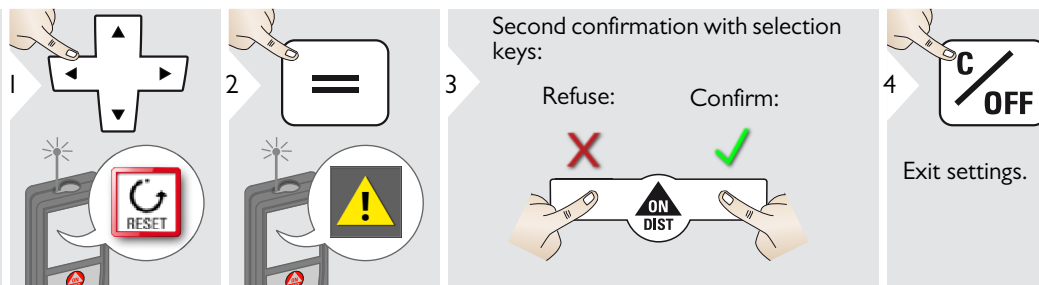

**i** Reset returns the instrument to the factory settings. All customized settings and memories are lost.

Overview







	Timer
	Calculator
	Adjusting measuring reference
	Memory
	Single Distance Measurement
	Smart Horizontal Mode

	Inclination Tracking
	Area
	Volume
	Triangle area
	Long Range Mode
	Height-profile Measurement




	Measuring on sloped objects
	Height Tracking
	Trapezium
	Stake out
	Pythagoras 1
	Pythagoras 2

Timer

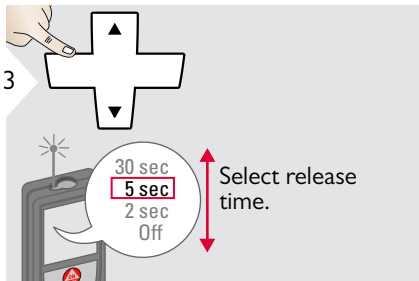




**i** The self release starts if ON/Measure key is pressed.

Calculator

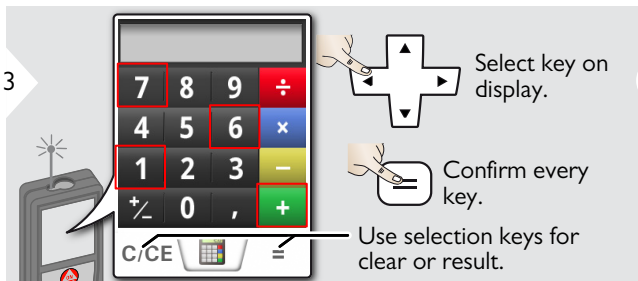

**i** The measurement result from the main line is taken over to the calculator and can be used for further calculations. Ft/in fractions are converted into ft/in decimal.

## Adjusting measuring reference/tripod

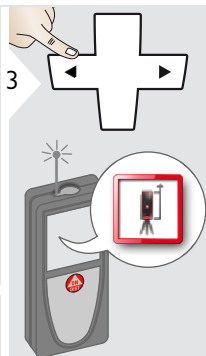

Distance is measured from the rear of the device (standard setting).





Distance is measured from a Leica DISTO Adapter FTA 360 (lock symbol = permanently)



Distance is measured from the tripod thread permanently.



Distance is measured from the front of the device (lock symbol = permanently).

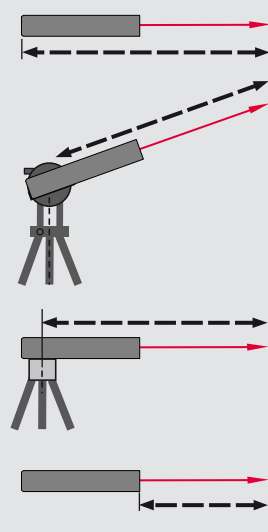

Confirm setting.

**i**

If device is switched off, reference goes back to standard setting (rear of the device).

If you use an original Leica DISTO adapter, the reference does not need to be adapted to tripod thread!

**Memory**

1 Press the center of the cross key.

2 Press the equals key.

3 Press the left arrow key to cycle through memory values:  
 12.208 m  
 6.554 m  
 23.889 m  
 8.449 m

Switch between measurements.

Delete memory.

Take over value for further actions.

4 Press the up/down arrow keys to view detailed results for the selected value (8.449 m).

Use Up/Down navigation keys to show more detailed results of the specific measurement.

Short cut

**Measuring single distance**

1 Press the center of the cross key.

2 Press the equals key.

3 Press the ON DIST key and aim the laser at target.

4 Press the ON DIST key to get the measurement: 8.532 m.

**Target surfaces:**  
 Measuring errors can occur when measuring to colourless liquids, glass, styrofoam or semi-permeable surfaces or when aiming at high gloss surfaces. Against dark surfaces the measuring time increases.

**Smart Horizontal Mode**

1 Press the center of the cross key.

2 Press the equals key.

3 Press the ON DIST key and aim laser at target.


4 Press the ON DIST key to get the measurement: 4.827 m.

$\alpha$  40.8° —  $\alpha$   
 $\alpha$  5.204 m — x  
 $\alpha$  0.032 m — y  
 4.827 m — z

(up to 360° and a transverse tilt of  $\pm 10^\circ$ )





**Inclination tracking**

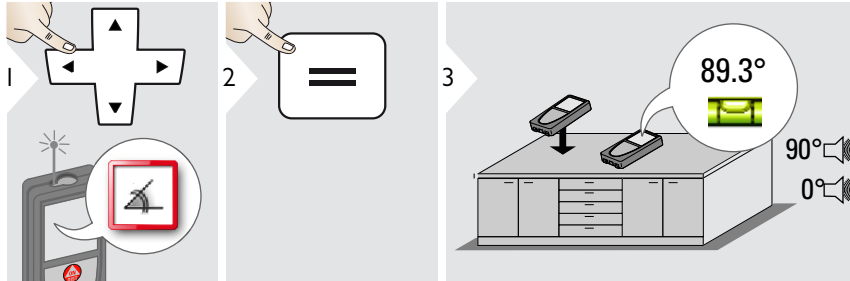

**i**

Inclination is permanently displayed. Instrument beeps at 0° and 90°. Ideal for horizontal or vertical adjustments.

**Area**

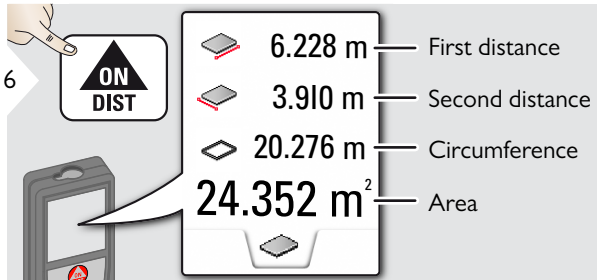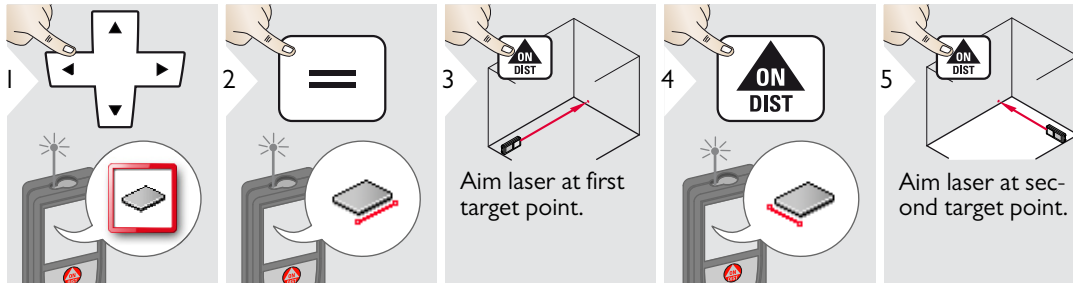

**i**

The result is shown in the main line and the measured value above. Partial Measurements / Painter function: Press + or - before starting the first measurement. Measure and add or subtract distances. Finish with =. Measure 2nd length.

**Volume**

1

2

3 Aim laser at first target point.

4 **ON DIST**

5 Aim laser at second target point.

6 **ON DIST**

7 Aim laser at third target point.

8

**ON DIST**




- 5.744 m — First distance
- 2.338 m — Second distance
- 2.431 m — Third distance
- 32.653 m<sup>3</sup>** — Volume

9


Use Up/Down navigation keys to show more results.

- 13.430 m<sup>2</sup> — Ceiling/floor area
- 39.300 m<sup>2</sup> — Wall areas
- 16.164 m — Circumference

**▲ Triangular area**




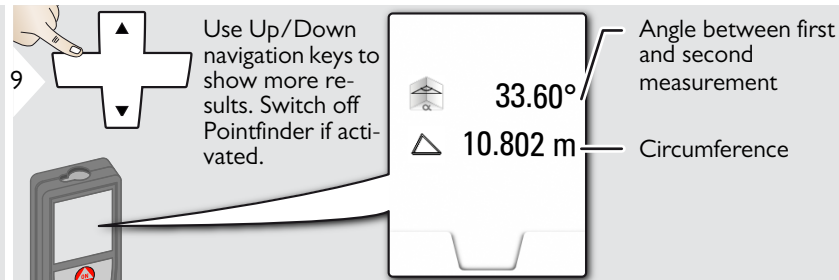
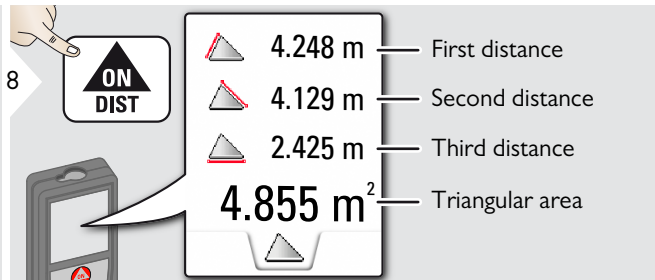
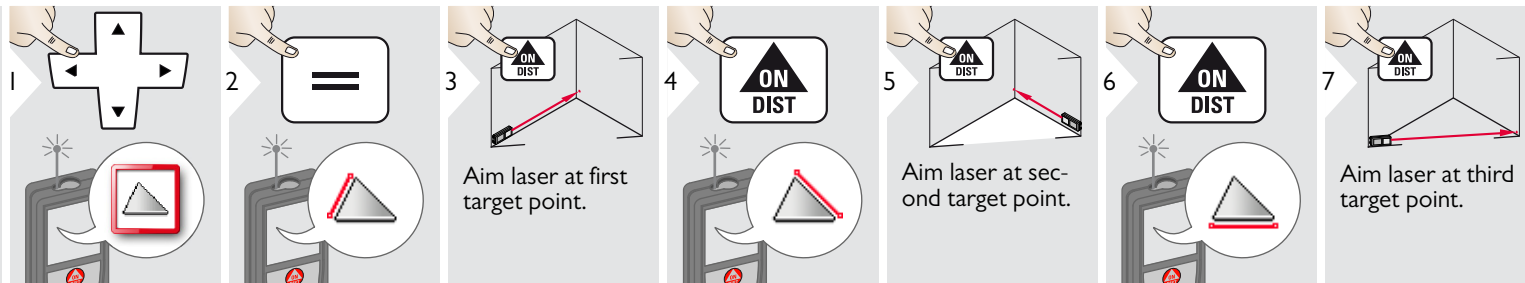


**LR Long range mode**

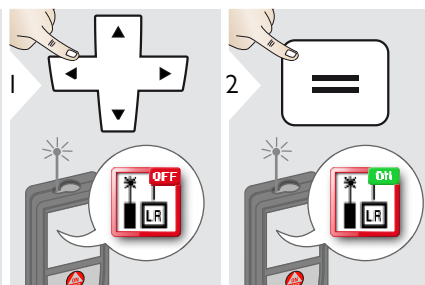




**i** The long range mode allows measuring of difficult targets in unfavorable conditions e.g. bright ambient light or bad target reflectivity. The measuring time is increased. An icon in the status line shows if the function is active.

 Height-profile measurement

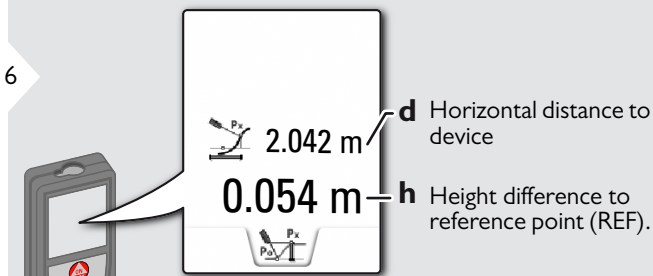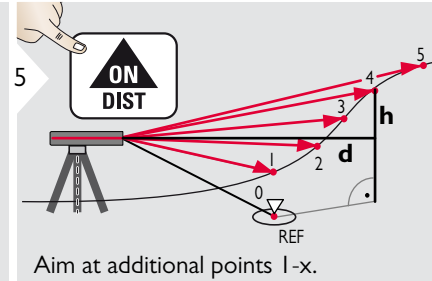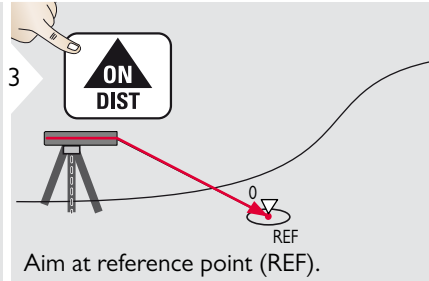

**i** Ideal for measuring of height differences to a reference point. Can be also used to measure profiles and terrain sections. After measuring the reference point, the horizontal distance and height is displayed for each following point.

 Sloped objects

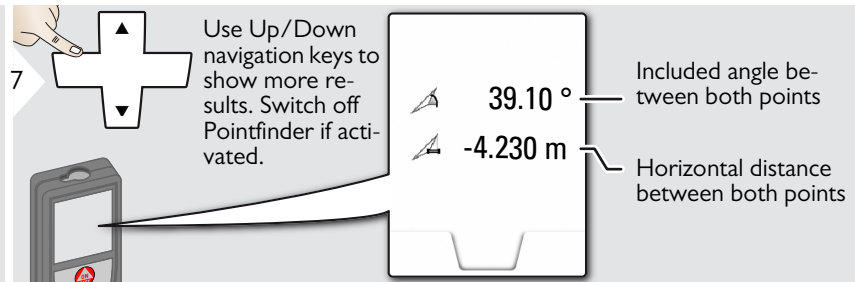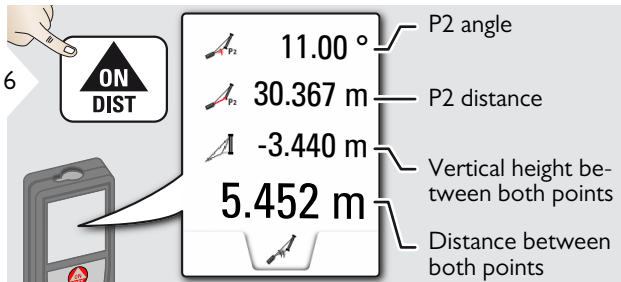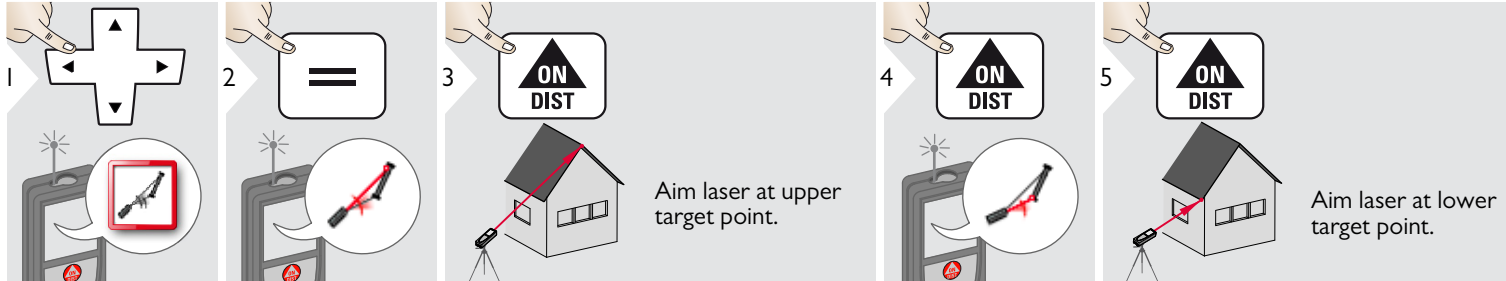

1

Indirect distance measuring between 2 points with additional results. Ideal for applications such as length and slope of roof, height of chimneys,...

It is important, that the instrument is positioned in the same vertical plane as the 2 measured points. The plane is defined of the line between the 2 points.

Height tracking

1 2 3 4 5

Aim laser at lower point.

Aim laser at upper points and angle/height tracking starts automatically.

6 7

$-10.55^\circ$  —  $\alpha$   
 $6.271\text{ m}$  —  $P0$   
 $29.89^\circ$  —  $\beta$  = Tracking angle if device is turned on tripod  
 $3.475\text{ m}$  —  $y$  = Tracking height if device is turned on tripod

Stops height tracking.

$-10.55^\circ$   
 $6.271\text{ m}$   
 $44.80^\circ$   
 $8.478\text{ m}$





8

Use Up/Down navigation keys to show more results. Switch off Pointfinder if activated.



$7.160\text{ m}$  —  $z$

**i** Heights of buildings or trees without suitable reflective points can be determined. At the bottom point, distance and tilt is measured - which needs a reflective laser target. The upper point can be targeted with the pointfinder / crosshair and does not need a reflective laser target as only the inclination is measured.

Trapezium

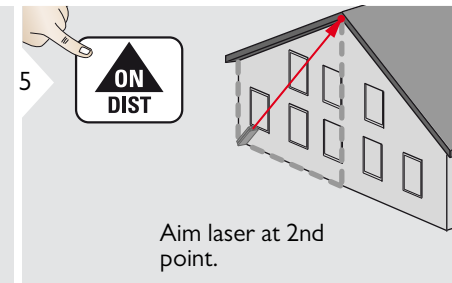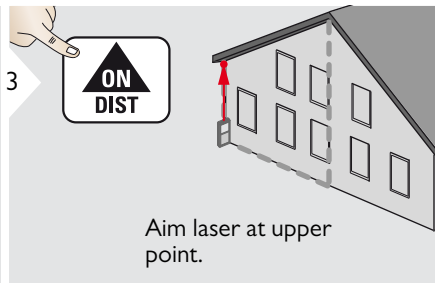

	13.459 m	— h
	16.440 m	— y
	70.80°	— β
	5.790 m	— x








Use Up/Down navigation keys to show more results. Switch off Pointfinder if activated.

	78.383 m <sup>2</sup>	— Trapezium area
	20.9°	— α


**Stake out**

1



Two different distances (a and b) can be entered to mark off defined measured lengths.

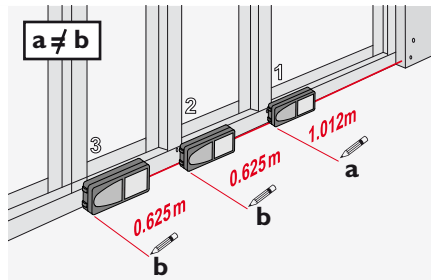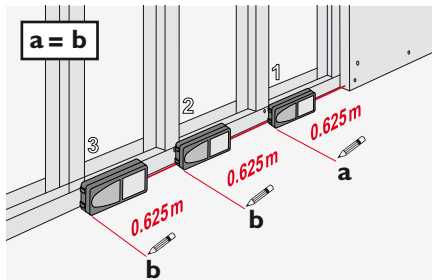


Select digit.



Adjust digit.




Approve value "a".



Adjust value "b".




Approve value "b" and start measurement.



Move device slowly along the stake-out line. The distance to the next stake out point is displayed.






0.240 m is missing up to next 0.625 m distance.

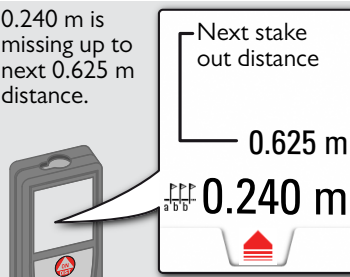

When approaching a stake out point to less than 0.1 m the instrument starts to beep. The function can be stopped by pressing the CLEAR/OFF button.



**Pythagoras (2-point)**

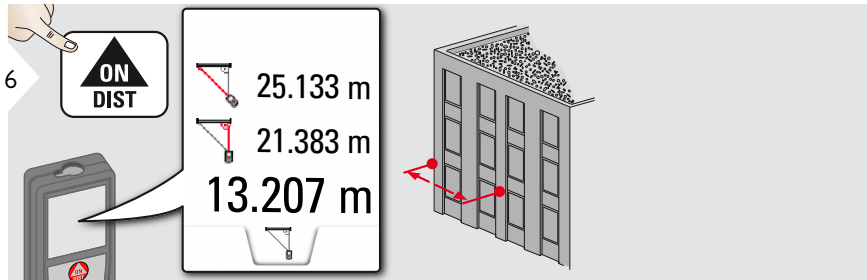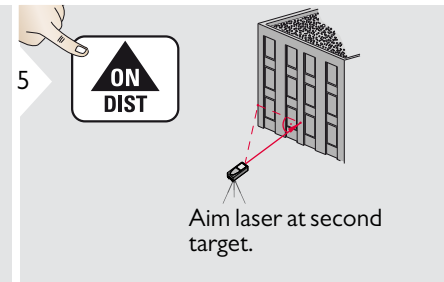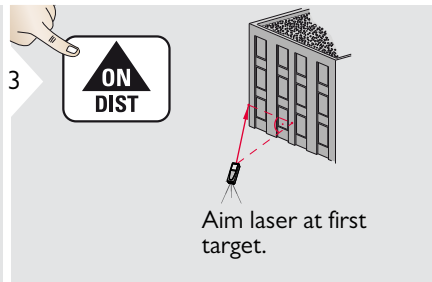

**i** The result is shown in the main line. Pressing the measuring key for 2 sec in the function activates automatically Minimum or Maximum measurement.

We recommend to use the pythagoras only for indirect horizontal measuring. For height measuring (vertical) it is more precise to use a function with the inclination measuring.

**Pythagoras (3-point)**

1

2

3 Aim laser at first target.

4 **ON DIST**

5 Aim laser at second target.

6 **ON DIST**

7 Aim laser at third target.

8

**ON DIST**

24.298 m  
21.264 m  
23.018 m  
20.571 m

**i** The result is shown in the main line. Pressing the measuring key for 2 sec in the function activates automatically Minimum or Maximum measurement.

We recommend to use the pythagoras only for indirect horizontal measuring. For height measuring (vertical) it is more precise to use a function with inclination measurement.

Distance measurement	
<b>Typical Measuring Tolerance*</b>	± 1.0 mm / ~1/16" ***
<b>Maximum Measuring Tolerance**</b>	± 2.0 mm / 0.08 in ***
<b>Typical Range*</b>	200 m / 660 ft
<b>Range at unfavourable condition ****</b>	80 m / 260 ft
<b>Smallest unit displayed</b>	0.1 mm / 1/32 in
<b>Power Range Technology™</b>	yes
<b>Ø laser point at distances</b>	6 / 30 / 60 mm (10 / 50 / 100 m)
Tilt measurement	
<b>Measuring tolerance to laser beam*****</b>	± 0.2°
<b>Measuring tolerance to housing*****</b>	± 0.2°
<b>Range</b>	360°
General	
<b>Laser class</b>	2
<b>Laser type</b>	620-670 nm, < 1 mW
<b>Protection class</b>	IP65 (dust tight and jet water protected)
<b>Autom. laser switch off</b>	after 90 s
<b>Autom. power switch-off</b>	after 180 s
<b>Bluetooth® Smart</b>	Bluetooth v4.0
<b>Range of Bluetooth®</b>	10 m
<b>Bluetooth®:</b>	
- Power	0.6 mW
- Frequency	2402 - 2480 MHz
<b>Battery durability (2 x AA)</b>	up to 5000 measurements
<b>Dimension (H x D x W)</b>	143 x 58 x 29 mm 5.6 x 2.28 x 1.14 in
<b>Weight (with batteries)</b>	198 g / 6.37 oz
<b>Temperature range:</b>	
- Storage	-25 to 70 °C -13 to 158 °F
- Operation	-10 to 50 °C 14 to 122 °F

\* applies for 100 % target reflectivity (white painted wall), low background illumination, 25 °C

\*\* applies for 10 to 100 % target reflectivity, high background illumination, - 10 °C to + 50 °C

\*\*\* Tolerances apply from 0.05 m to 10 m with a confidence level of 95%. The maximum tolerance may deteriorate to 0.1 mm/m between 10 m to 30 m, to 0.20 mm/m between 30 m to 100 m and to 0.30 mm/m for distances above 100 m

\*\*\*\* applies for 100 % target reflectivity, background illumination of approximately 30'000 lux

\*\*\*\*\* after user calibration. Additional angle related deviation of +/- 0.01° per degree up to +/- 45° in each quadrant. Applies at room temperature. For the whole operating temperature range the maximum deviation increases by +/- 0.1°.

**i** For accurate indirect results, the use of a tripod is recommended. For accurate tilt measurements a transverse tilt should be avoided.

Functions	
<b>Distance measuring</b>	yes
<b>Min/Max measuring</b>	yes
<b>Permanent measuring</b>	yes
<b>Stake-out</b>	yes
<b>Addition/Subtraction</b>	yes
<b>Area</b>	yes
<b>Triangle area</b>	yes
<b>Volume</b>	yes
<b>Trapezium</b>	yes
<b>Painter function (area with partial measur.)</b>	yes
<b>Pythagoras</b>	2-point, 3-point
<b>Smart Horizontal Mode / Indirect height</b>	yes
<b>Height-profile measurement</b>	yes
<b>Inclination tracking</b>	yes
<b>Sloped objects</b>	yes
<b>Height tracking</b>	yes
<b>Memory</b>	30 displays
<b>Beep</b>	yes
<b>Illuminated colour display</b>	yes
<b>Multifunctional endpiece</b>	yes
<b>Pointfinder (Viewscreen)</b>	4xZoom
<b>Digital Level</b>	yes
<b>Bluetooth® Smart</b>	yes
<b>Personalized Favorites</b>	yes
<b>Timer</b>	yes
<b>Long Range Mode</b>	yes
<b>Calculator</b>	yes

If the message **Error** does not disappear after switching on the device repeatedly, contact the dealer.

If the message **InFo** appears with a number, press the Clear button and observe the following instructions:

No.	Cause	Correction
156	Transverse tilt greater than 10°	Hold the instrument without any transverse tilt.
162	Calibration mistake	Make sure, the device is placed on a absolutely horizontal and flat surface. Repeat the calibration procedure. If the mistake still occurs, contact your dealer.
204	Calculation error	Perform measurement again.
240	Data transfer error	Repeat procedure.
252	Temperature too high	Let device cool down.
253	Temperature too low	Warm device up.
255	Received signal too weak, measuring time too long	Change target surface (e.g. white paper).
256	Received signal too high	Change target surface (e.g. white paper).
257	Too much back-ground light	Shadow target area.
258	Measurement outside of measuring range	Correct range.
260	Laser beam interrupted	Repeat measurement.

- Clean the device with a damp, soft cloth.
- Never immerse the device in water.
- Never use aggressive cleaning agents or solvents.

## Warranty

### International Limited Warranty

The Leica DISTO™ comes with a two year warranty from Leica Geosystems AG. To receive an additional year warranty, the product must be registered on our website at <http://myworld.leica-geosystems.com> within eight weeks of the purchase date. If the product is not registered, our two year warranty applies.

More detailed information about the International Limited Warranty can be found on the internet at: [www.leica-geosystems.com/internationalwarranty](http://www.leica-geosystems.com/internationalwarranty).

The person responsible for the instrument must ensure that all users understand these directions and adhere to them.

### Areas of responsibility

#### Responsibilities of the manufacturer of the original equipment:

Leica Geosystems AG

Heinrich-Wild-Strasse

CH-9435 Heerbrugg

Internet: [www.disto.com](http://www.disto.com)

The company above is responsible for supplying the product, including the User Manual in a completely safe condition.

The company above is not responsible for third party accessories.

#### Responsibilities of the person in charge of the instrument:

- To understand the safety instructions on the product and the instructions in the User Manual.
- To be familiar with local safety regulations relating to accident prevention.
- Always prevent access to the product by unauthorised personnel.

## Permitted use

- Measuring distances
- Tilt measurement
- Data transfer with Bluetooth®

## Prohibited use

- Using the product without instruction
- Using outside the stated limits
- Deactivation of safety systems and removal of explanatory and hazard labels
- Opening of the equipment by using tools (screwdrivers, etc.)
- Carrying out modification or conversion of the product
- Use of accessories from other manufacturers without express approval
- Deliberate dazzling of third parties; also in the dark
- Inadequate safeguards at the surveying site (e.g. when measuring on roads, construction sites, etc.)
- Deliberate or irresponsible behaviour on scaffolding, when using ladders, when measuring near machines which are running or near parts of machines or installations which are unprotected
- Aiming directly in the sun

## Hazards in use

### **WARNING**

Watch out for erroneous measurements if the instrument is defective or if it has been dropped or has been misused or modified. Carry out periodic test measurements. Particularly after the instrument has been subject to abnormal use, and before, during and after important measurements.


### **CAUTION**

Never attempt to repair the product yourself. In case of damage, contact a local dealer.

### **WARNING**

Changes or modifications not expressly approved could void the user's authority to operate the equipment.

## Limits of use

-  Refer to section "Technical data".
- The device is designed for use in areas permanently habitable by humans. Do not use the product in explosion hazardous areas or in aggressive environments.

## Disposal

### **CAUTION**

Flat batteries must not be disposed of with household waste. Care for the environment and take them to the collection points provided in accordance with national or local regulations.

The product must not be disposed with household waste.

Dispose of the product appropriately in accordance with the national regulations in force in your country.



Adhere to the national and country specific regulations.

Product specific treatment and waste management can be downloaded from our homepage.

## Electromagnetic Compatibility (EMC)

### **WARNING**

The device conforms to the most stringent requirements of the relevant standards and regulations.

Yet, the possibility of causing interference in other devices cannot be totally excluded.

## FCC statement (applicable in U.S.)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference, and
- this device must accept any interference received, including interference that may cause undesired operation.

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- This device may not cause interference and
- this device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme à la section 15 des règlements FCC. Son fonctionnement est soumis aux deux conditions suivantes :

- cet appareil ne doit pas causer d'interférences nuisibles, et
- cet appareil doit accepter toute autre interférence reçue, y compris les interférences pouvant entraîner un fonctionnement non désiré.

Ce dispositif est conforme à la norme RSS-210 d'Industrie Canada. L'utilisation est sujette aux deux conditions suivantes :

- ce dispositif ne doit pas être la source d'interférences nuisibles, et

- ce dispositif doit accepter toutes les interférences, y compris les interférences pouvant induire des opérations non souhaitées.

## Use of the product with Bluetooth®

### WARNING


Electromagnetic radiation can cause disturbances in other equipment, in installations (e.g. medical ones such as pacemakers or hearing aids) and in aircraft. It can also affect humans and animals.

### Precautions:

Although this product conforms to the most stringent standards and regulations, the possibility of harm to people and animals cannot totally be excluded.

- Do not use the product near petrol stations, chemical plants, in areas with a potentially explosive atmosphere and where blasting takes place.
- Do not use the product near medical equipment.
- Do not use the product in airplanes.
- Do not use the product near your body for extended periods.

## Laser classification

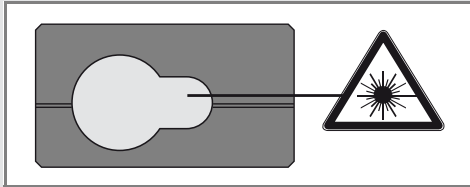

The device produces visible laser beams, which are emitted from the instrument: It is a Class 2 laser product in accordance with:

- IEC60825-1 : 2014, „Radiation safety of laser products“

### Laser Class 2 products:

Do not stare into the laser beam or direct it towards other people unnecessarily. Eye protection is normally afforded by aversion responses including the blink reflex.

#### **WARNING**


Looking directly into the beam with optical aids (e.g. binoculars, telescopes) can be hazardous.

#### **CAUTION**

Looking into the laser beam may be hazardous to the eyes.

Description	Value
Wavelength	620 - 670 nm
Maximum radiant output power for classification	< 1 mW
Pulse repetition frequency	320 MHz
Pulse duration	> 400 ps
Beam divergence	0.16 x 0.6 mrad

## Labelling

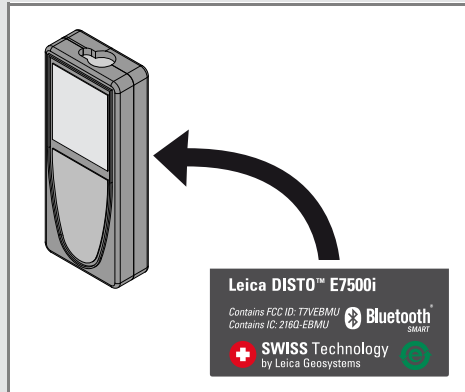

Subject to change (drawings, descriptions and technical data) without prior notice.



Leica Geosystems AG, Heerbrugg, Switzerland has been certified as being equipped with a quality system which meets the International Standards of Quality Management and Quality Systems (ISO standard 9001) and Environmental Management Systems (ISO standard 14001).

Total Quality Management - Our commitment to total customer satisfaction. Ask your local Leica Geosystems agent for more information about our TQM program.

Copyright Leica Geosystems AG, Heerbrugg,  
Switzerland 2020  
Original text (792324d EN)

Pat. No.: WO 9427164, WO 9818019, WO 0244754, WO 0216964,  
US 5949531, EP 1195617, US 7030969, US 8279421 B2,  
Patents pending

Leica Geosystems AG  
CH-9435 Heerbrugg  
(Switzerland)  
[www.disto.com](http://www.disto.com)

- when it has to be **right**

**Leica**  
Geosystems